


Pneumatic pumps for the transfer of grease or high viscosity oils at a constant pressure.

Grease

10:1

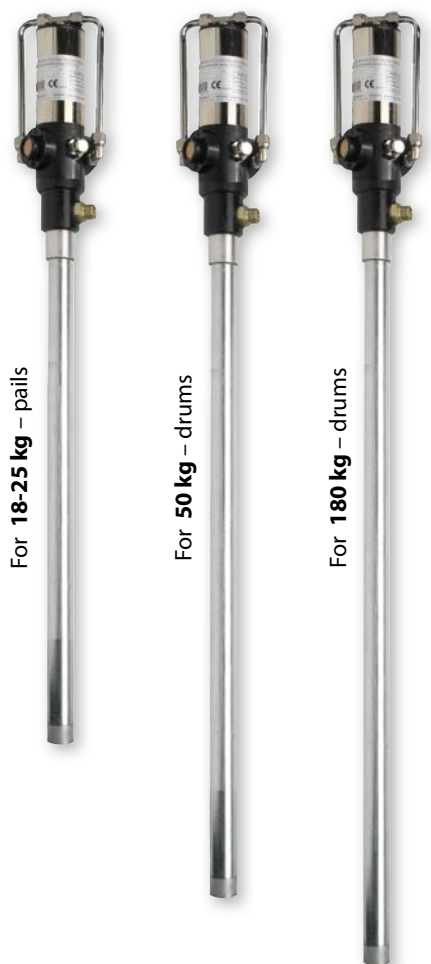


Art.no.
4043/20

Art.no.
4043/60

Art.no.
4043/180

25:1

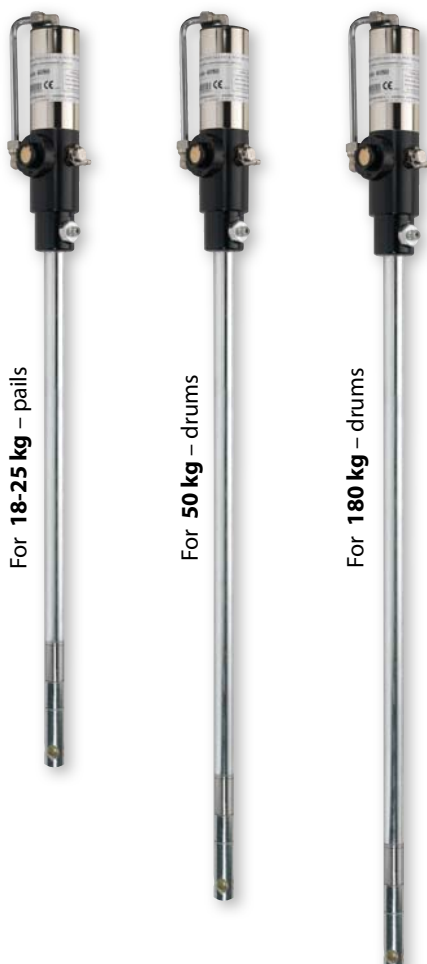

Art.no.
4022

Art.no.
4062

Art.no.
4082

45:1






Art.no.
4083/20

Art.no.
4083/60

Art.no.
4083/180

See accessories on pages 55 - 63!

Art. no.	4043/20	4043/60	4043/180	4022	4062	4082	4083/20	4083/60	4083/180
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)			Pressure min 2 - max 8 bar (30 - 116 psi)			Pressure min 2 - max 8 bar (30 - 116 psi)		
Compression ratio	10:1			25:1			45:1		
Outlet pressure	80 bar (1200 psi)			200 bar (2900 psi)			360 bar (5200 psi)		
Delivery	7800 g/min			5100 g/min			6300 g/min		
Connection compressed air	3/8" BSP (F)			1/4" BSP (F)			3/8" BSP (F)		
Connection lubricant outlet	1/2" BSP (M)			1/2" BSP (M)			1/2" BSP (M)		
Max air consumption with 8 bar pressure	165 l/min			78 l/min			165 l/min		
Length suction tube	450 mm	750 mm	950 mm	450 mm	750 mm	950 mm	450 mm	750 mm	950 mm
Diameter suction tube	33 mm			28 mm			28 mm		
Dimensions LxWxH (mm)	95x95x690	95x95x780	95x95x1005	95x95x690	95x95x780	95x95x1005	95x95x690	95x95x780	95x95x1005
Suitable for pails / drums of	18 - 25 kg	50 kg	180 kg	18 - 25 kg	50 kg	180 kg	18 - 25 kg	50 kg	180 kg
Weight	4.5 kg	5.3 kg	5.7 kg	4.2 kg	5 kg	5.6 kg	4.4 kg	5.2 kg	5.8 kg



The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C -- Compressed air pressure 8 bar -- free flow outlet 1/2".