



**ELECTRICAL SAFETY PANEL 230 VAC
SINGLE-PHASE**



Art.no. **7370+4265**

Plastic electrical safety panel which allows the stop of the pump at the end of the delivery.

This kit includes the adjustable pressure switch art.no. 4265.


Art.no.	Dimensions	Weight	Ampere	Frequency	Protection
7370 + 4265	195x150x170(h) mm	3 kg	4 A	50 Hz	IP 55

Art.no. **4094/180**

Electric pump **230 VAC single-phase 50 Hz** (upon request **60 Hz**) for grease transfer in centralized applications where power supply is available. The pump is also provided with a relief valve.

Optional:

- Electrical panel and pressure switch
- Pivoting wall bracket art.no. 2214/50.

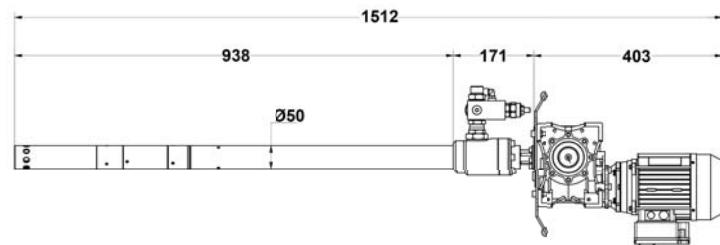

Art.no.	Voltage	Engine revolutions reduction ratio	Suction tube dimensions	Suction tube length	Max Outlet pressure	Flow rate	RPM	Power	Suitable for drums of	Weight
4094/180	230 VAC single-phase 50 Hz	7.5:1	Outer diameter 50 mm Piston diameter 30 mm	950	50 bar (725 psi)	4000 g/min	1400	1.1 kW	180 kg	26 kg

The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C