



OPTIONAL
Bracket
Art.no. 2214/50

**ELECTRICAL SAFETY PANEL 230 VAC / 380 VAC
THREE-PHASE**

OPTIONAL



Adjustable
pressure
switch
Art.no. 4265

Art.no. 7370T+4265

Art.no. 7377+4265

Metal electrical safety panel 230 VAC (Art.no. 7370T) or 380 VAC (Art.no. 7377) which allows to stop of the pump at the end of the dispensing operation.

This kit includes the pressure switch.

Art.no.	Dimensions	Alim.	Weight	Ampere	Frequency	Protection
7370T	600x400x280(h) mm	230 V	10 kg	4 A	50 Hz	IP 55
7377		380 V				


Art.no. 4097/180

Art.no. 4098/180

Electric pump **230 VAC / 380 VAC three-phase 50 Hz** (upon request **60 Hz**) for grease transfer in centralized applications where power supply is available. These pumps offer the possibility to easily switch the different lengths of suction tubes and are also provided with a relief valve.

Optional:

- Electrical panel and pressure switch
- Pivoting wall bracket Art.no. 2214/50

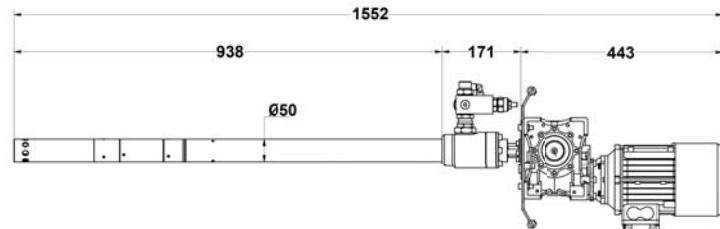

Art.no.	Voltage	Engine revolutions reduction ratio	Suction tube dimensions	Suction tube length	Max Outlet pressure	Flow rate	RPM	Power	Suitable for drums of	Weight
4097/180	230 VAC / 380 VAC - three-phase - 50 Hz	7.5:1	Outer diameter 50 mm Piston diameter 30 mm	950	70 bar (1015 psi)	8000 g/min	2800	1.1 kW		27 kg
4098/180						4000 g/min	1400	0.75 kW	180 kg	26 kg

The a. m. performance values are based upon the following test conditions: lithium grease NLGI 0 at 22°C