

Pneumatic pumps for the supply of medium and high viscosity oils for the use in mobile kits or in pipeworks.

## STANDARD SERIES

Oil



Double acting - 18 l/min

Art.no. **2035**  
**Oil**



Double acting - 18 l/min


Art.no. **2025**  
**Oil**  
Art.no. **2025130**  
**Oil IBC 1000 l**



Single acting - 13 l/min

Art.no. **2075/L**  
**Oil**

5:1

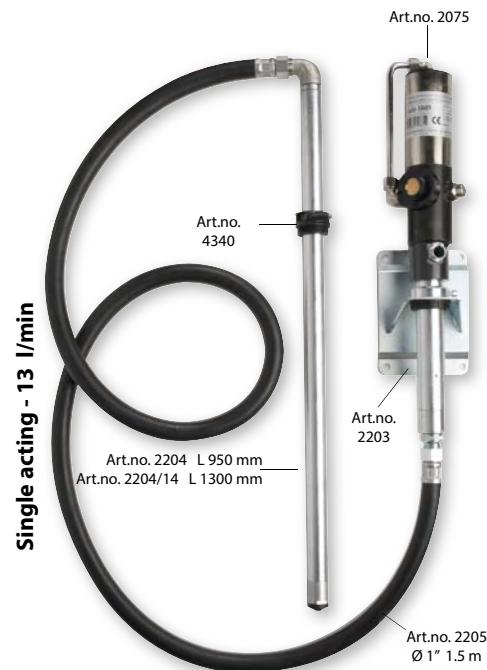

Single acting - 13 l/min

Art.no. **2076**  
**Oil**

Art.no. **2076130**  
**Oil IBC 1000 l**



Double acting - 18 l/min

Art.no. **2061**

Art.no. **2061130**  
**Oil IBC 1000 l**

See accessories on pages 74-75 and 86-94!

| Art. no.                                | 2035                                      | 2025<br>2025130 | 2061<br>2061130 | 2075/L   | 2076<br>2076130 | 2059      | 2075      |
|-----------------------------------------|-------------------------------------------|-----------------|-----------------|----------|-----------------|-----------|-----------|
| Compressed air supply                   | Pressure min 2 - max 8 bar (30 - 116 psi) |                 |                 |          |                 |           |           |
| Compression ratio                       | 5:1                                       |                 |                 |          |                 |           |           |
| Outlet pressure                         | 40 bar (580 psi)                          |                 |                 |          |                 |           |           |
| Delivery                                | 18 l/min                                  |                 |                 | 13 l/min |                 | 18 l/min  | 13 l/min  |
| Connection compressed air               | 1/4" BSP (F)                              |                 |                 |          |                 |           |           |
| Connection lubricant outlet             | 1/2" BSP (M)                              |                 |                 |          |                 |           |           |
| Max air consumption with 8 bar pressure | 210 l/min                                 |                 |                 |          |                 |           |           |
| Length suction tube (mm)                | 750                                       | 950/1300        | 950/1300        | 950      | 950/1300        | 260       |           |
| Diameter suction tube                   | 40 mm                                     |                 |                 |          |                 | 45 mm     | 40 mm     |
| Suitable for drums of                   | 60 l                                      | 208/1000 l      | 208/1000 l      | 208 l    | 208/1000 l      | Any       | Any       |
| Weight                                  | 5.2 kg                                    | 5.8 kg          | 9 kg            | 9 kg     | 5 kg            | 4.6 kg    | 4 kg      |
| Dimensions (l xWxH) (mm)                | 95x95x1070                                | 95x95x1270      |                 |          | 95x95x950       | 95x95x700 | 95x95x560 |

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C  
Compressed air pressure 8 bar - free flow outlet.

