

Heavy duty pneumatic pumps, industrial pump series "Power Bull", designed for the supply of oil under demanding conditions. Particularly suitable for the oil distribution in pipeworks and installations where a simultaneous supply of oil is required on different dispensing points at high pressure and/or with a high delivery.

POWER BULL SERIES

oil



Double acting - Delivery 40 l/min

Art.no. 2092



Double acting - Delivery 67 l/min

Art.no. 2093




Double acting - Delivery 55 l/min

Art.no. 2094

See accessories on pages
74-75 and 86-94!

Art. no.	2092	2093	2094
Compressed air supply	Pressure min 2 - max 8 bar (30 - 116 psi)		
Compression ratio	7:1	4:1	6:1
Delivery	40 l/min	67 l/min	55 l/min
Outlet pressure	56 bar (810 psi)	32 bar (465 psi)	48 bar (700 psi)
Max frequence strokes/min	120		60
Max air consumption with 8 bar pressure max a 8 bar	1.92 m³/min		1.80 m³/min
Diameter pneumatic piston	125 mm		160 mm
Diameter suction tube	55 x 50 mm	80 x 70 mm	
Connection lubricant outlet	1" BSP (M)		
Connection compressed air	1/2" BSP (F)		
Application	Wall mounted pump		
Weight	15 kg	20 kg	32 kg
Dimensions (LxWxH) (mm)	158x160x1300		

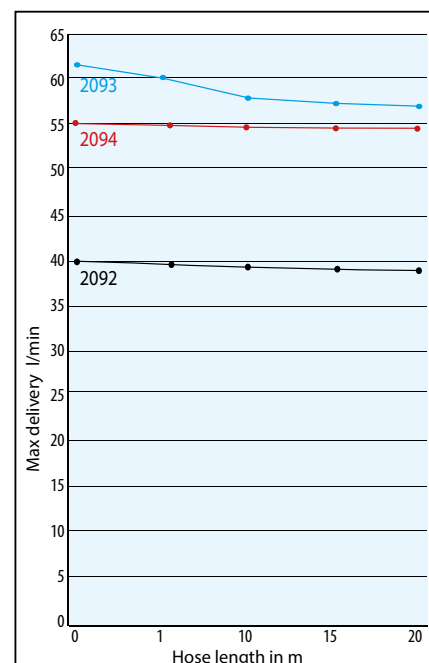

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C - Compressed air pressure 8 bar