

Ø 1/2"



Art.no. **2180**
Oil control gun, body in anodized aluminium, impact resistant, with trigger guard, cartridge filter, connections 1/2" BSP (F), max flow 50 l/min, max pressure 70 bar.

Art.no. **2181**
Oil control gun, based on art. no. 2180, with 1/2" BSP (M) inlet swivel, flexible rubber outlet, Ø 1/2", with 80° stem and automatic anti-drip nozzle.

Art.no. **2182**
Oil control gun, based on art. no. 2180, with 1/2" BSP (M) inlet swivel, flexible rubber outlet, Ø 1/2", with 90° stem and manual anti-drip nozzle.


Art.no. **2185**
Oil control gun, based on art. no. 2180, with 1/2" BSP (M) inlet swivel, rigid outlet, Ø 12 mm and automatic anti-drip nozzle.

Art.no. **2185/AG**
Antifreeze control gun, based on art. no. 2180, with 1/2" BSP (M) inlet swivel, rigid outlet, Ø 12 mm and automatic anti-drip nozzle.

Art.no. **2186**
Oil control gun, based on art.no. 2185, but equipped with combined manual/automatic anti-drip nozzle, art.no. 2146.

Art.no. **2187**
Oil control gun, based on art.no. 2181, but equipped with combined manual/automatic anti-drip nozzle, art.no. 2146.

Ø 3/4"

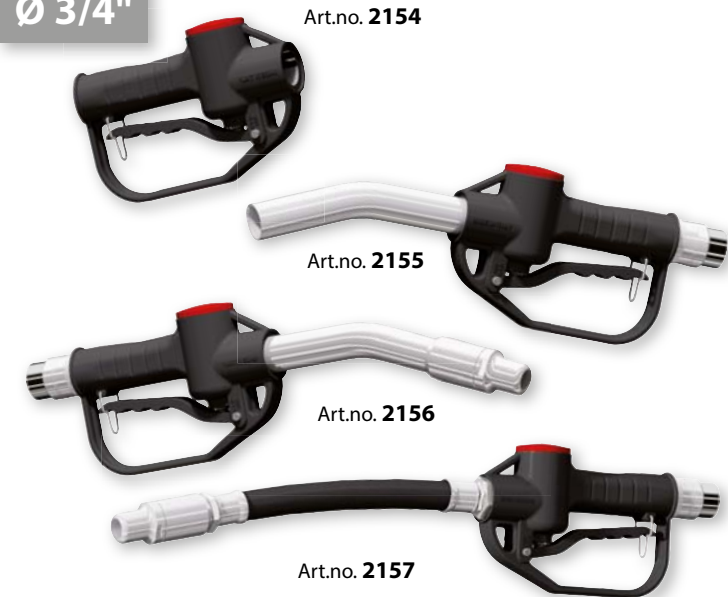


Art.no. **2154**
Oil control gun, body in anodized aluminium, impact resistant, with trigger guard, cartridge filter, connections 3/4" BSP (F), max. flow 100 l/min., max. pressure 70 bar.

Art.no. **2155**
Oil control gun, based on art.no. 2154, with 3/4" BSP (M) inlet swivel, rigid outlet, ø 3/4", without automatic anti-drip nozzle.

Art.no. **2156**
Oil control gun, based on art.no. 2154, with 3/4" BSP (M) inlet swivel, rigid outlet, ø 3/4", and automatic anti-drip nozzle.

Art.no. **2157**
Oil control gun, based on art.no. 2154, with 3/4" BSP (M) inlet swivel, flexible rubber outlet, ø 3/4", and automatic anti-drip nozzle.

Ø 1"

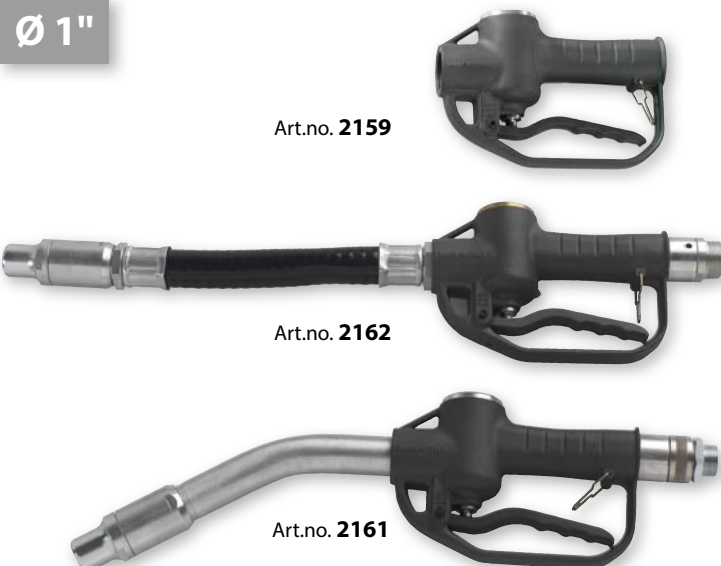

Art.no. **2159**
High delivery oil control gun, body in anodized aluminium, impact resistant, connections 1" BSP (F), max. flow 150 l/min., max. pressure 100 bar.

Art.no. **2162**
High delivery oil control gun, based on art.no. 2159, with 1" BSP (M) inlet swivel, flexible rubber outlet, ø 1" (Ø 25x32 mm), with connections 1" BSP (M) and automatic anti-drip nozzle.

Art.no. **2161**
High delivery oil control gun, based on art.no. 2159, with 1" BSP (M) inlet swivel, rigid outlet Ø 26x32 mm and automatic anti-drip nozzle.