

FIXED AUTOMATIC HOSE REELS IN AISI 304 STAINLESS STEEL FOR AIR-WATER 20 bar

Equipped with:

- Blue polyurethane ether-based hoses
- Nickel-plated brass or galvanized steel connections
- Brass 90° swivelling joint
- Viton® seals



FX-400

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2201-300	without hose	-	-	F1/2" - M3/8" BSP
070-2201-400	without hose	-	-	F1/2" - M1/2" BSP
070-2201-215	15 m	8x12	20 bar	F1/2" G - M1/4" G gir.
070-2201-220	20 m	8x12	20 bar	F1/2" G - M1/4" G gir.
070-2201-310	10 m	10x14	20 bar	F1/2" - M3/8" BSP
070-2201-315	15 m	10x14	20 bar	F1/2" - M3/8" BSP
070-2201-410	10 m	13x19	20 bar	F1/2" - M1/2" BSP




FX-460

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2301-300	without hose	-	-	F1/2" - M3/8" BSP
070-2301-400	without hose	-	-	F1/2" - M1/2" BSP
070-2301-320	20 m	10x14	20 bar	F1/2" - M3/8" BSP
070-2301-415	15 m	13x19	20 bar	F1/2" - M1/2" BSP
070-2301-418	18 m	13x19	20 bar	F1/2" - M1/2" BSP




FX-550

Article	L. hose	Ø hose	Max pressure	Inlet-Outlet
070-2401-400	without hose	-	-	F1/2" - M1/2" BSP
070-2401-420	20 m	13x19	20 bar	F1/2" - M1/2" BSP
070-2401-425	25 m	13x19	20 bar	F1/2" - M1/2" BSP

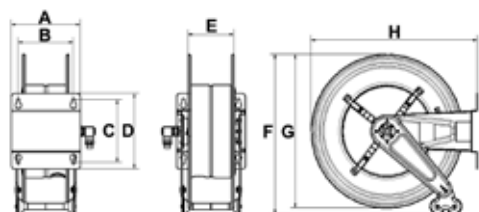


OVERALL DIMENSIONS FIXED VERSION


Mod.	A	B	C	D	E	F	G	H	Kg	m³	N°
FX-400	158	120	168	192	95	460	400	435	12,50<19,50	0,084	1
FX-460	158	120	168	192	95	490	460	490	16,50<23,00	0,094	1
FX-550	200	150	225	270	120	590	550	600	22,00<28,00	0,130	1




Wall application with
inside output hose



Wall application with
external output hose



Wall and ceiling application
with frontal output hose



Application bench with
frontal output hose